

Parallel Connectors

ADP Stranded Cable

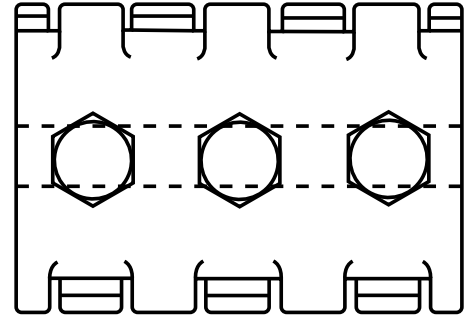
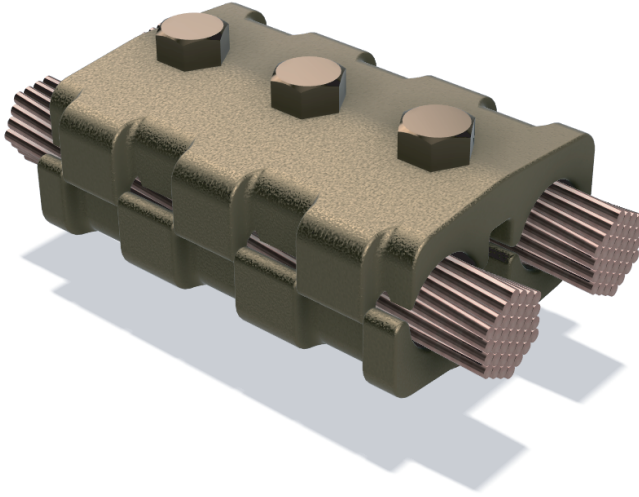


Fig 2

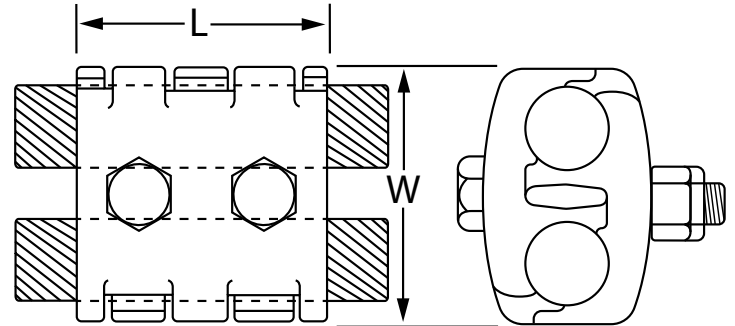


Fig 1

Designed for two cables running parallel. Can accommodate conductors of two different sizes within cable range indicated. Where higher mechanical strength is required two or more connectors can be used in multiple.

CABLE RANGE				CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES		BOLT DIAMETER
RUN		TAP				L	W	
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM					
6	2/0	6	2/0	ADP-100	1	2 3/8	1 7/8	3/8
1	4/0	1	4/0	ADP-111	1	2 3/8	2	3/8
1	4/0	1	4/0	ADP-112	2	3 3/4	2	3/8
1/0	300	1/0	300	ADP-120	1	2 5/8	2 1/16	3/8
1/0	300	1/0	300	ADP-121	2	4	2 1/16	3/8
300	500	300	500	ADP-130	2	4	2 1/2	1/2
500	800	500	800	ADP-140	2	4 1/2	3 3/32	1/2
750	1000	750	1000	ADP-150	2	5	3 1/2	1/2
1000	1500	1000	1500	ADP-170	2	5 1/2	4 3/8	5/8
1500	2000	1500	2000	ADP-180	2	5 1/2	4 5/8	5/8

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

