

# Terminal Connectors

## FLL Tubing to Pad

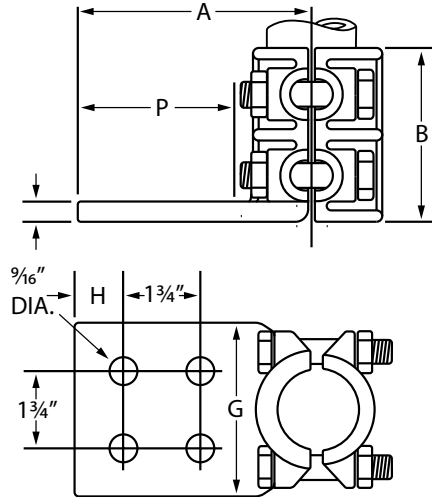
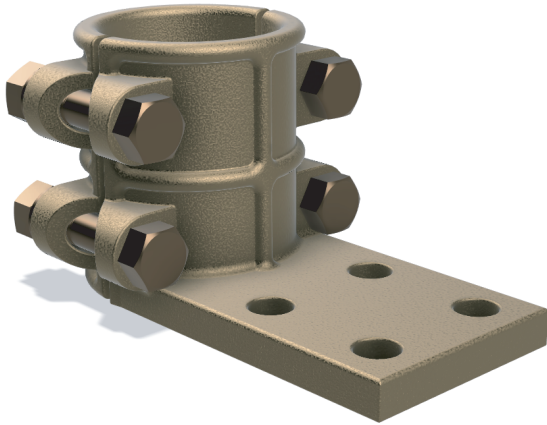


Fig. 3

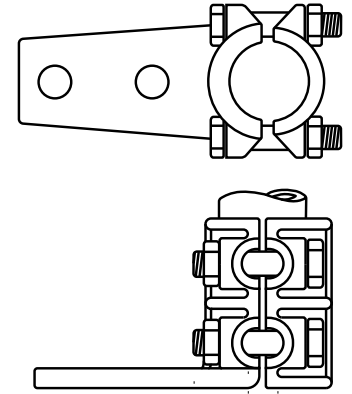


Fig. 4

These 90° terminal lugs find many applications where electrical clearances must be maintained and space is limited.

| I.P.S. | RATED SWITCH<br>AMP CAPACITY | CATALOG<br>NUMBER | FIGURE<br>NUMBER | DIMENSIONS IN INCHES |         |       |       |   |       | BOLT DIA.<br>I.P.S. CLAMP |
|--------|------------------------------|-------------------|------------------|----------------------|---------|-------|-------|---|-------|---------------------------|
|        |                              |                   |                  | A                    | B       | G     | H     | P | T     |                           |
| 2      | 400 & 600                    | FLL-160           | 4                | 4 13/16              | 2 7/8   | 1 1/2 | 5/8   | 3 | 1/2   | 1/2                       |
| 2      | 1200                         | FLL-161           | 3                | 4 25/32              | 3 1/2   | 3     | 5/8   | 3 | 1/2   | 1/2                       |
| 2      | 2000                         | FLL-162           | 3                | 5 13/16              | 3 3/4   | 4     | 1 1/8 | 4 | 1/2   | 1/2                       |
| 2 1/2  | 400 & 600                    | FLL-169           | 4                | 5 1/16               | 3 3/16  | 1 1/2 | 5/8   | 3 | 3/8   | 1/2                       |
| 2 1/2  | 1200                         | FLL-170           | 3                | 5 1/16               | 3 1/2   | 3     | 5/8   | 3 | 9/16  | 1/2                       |
| 2 1/2  | 2000                         | FLL-171           | 3                | 6 1/16               | 4 1/2   | 4     | 1 1/8 | 4 | 5/8   | 1/2                       |
| 3      | 400 & 600                    | FLL-179           | 4                | 5 3/8                | 4 1/2   | 1 1/2 | 5/8   | 3 | 9/16  | 1/2                       |
| 3      | 1200                         | FLL-180           | 3                | 5 3/8                | 4 1/2   | 3     | 5/8   | 3 | 9/16  | 5/8                       |
| 3      | 2000                         | FLL-181           | 3                | 6 13/32              | 5 1/4   | 4     | 1 1/8 | 4 | 5/8   | 5/8                       |
| 3 1/2  | 400 & 600                    | FLL-188           | 4                | 5 11/16              | 4 3/8   | 1 1/2 | 5/8   | 3 | 5/8   | 5/8                       |
| 3 1/2  | 1200                         | FLL-189           | 3                | 5 3/4                | 4 1/2   | 3     | 5/8   | 3 | 11/16 | 5/8                       |
| 3 1/2  | 2000                         | FLL-190           | 3                | 6 5/8                | 4 3/8   | 4     | 1 1/8 | 4 | 5/8   | 5/8                       |
| 4      | 400 & 600                    | FLL-198           | 4                | 5 15/16              | 3 15/16 | 1 1/2 | 5/8   | 3 | 1/2   | 5/8                       |
| 4      | 1200                         | FLL-199           | 3                | 5 15/16              | 3 15/16 | 3     | 5/8   | 3 | 1/2   | 5/8                       |
| 4      | 2000                         | FLL-200           | 3                | 7 1/8                | 5 1/2   | 4     | 1 1/8 | 4 | 1/2   | 5/8                       |

(continued)

For cross reference or other  
information, please contact us.  
[deltastarcc.com](http://deltastarcc.com)



**DELTA STAR  
CONNECTOR COMPANY**

