

Terminal Connectors

FL (AL) Tubing to Pad

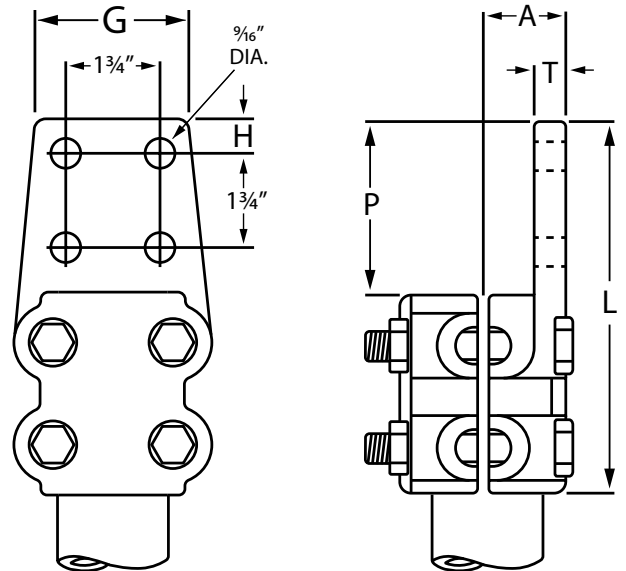
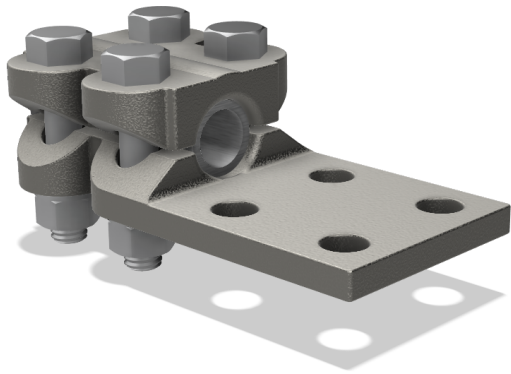


Fig. 2




Fig. 1




Fig. 3

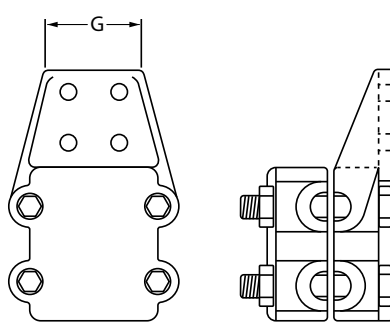


Fig. 4

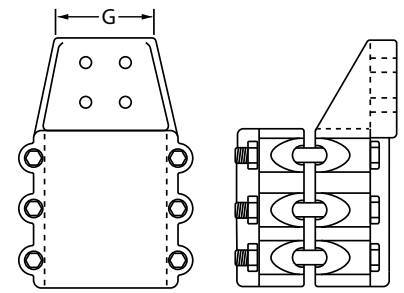


Fig. 5

The "FL" terminal lug provides an economical method connecting S.P.S. or E.H.P.S. tubing to rectangular copper or aluminum bus bar, switch terminal or similar flat-surface conductor. The lug is designed to carry the full rated ampere capacity of the tubing or bus bar, whichever is smaller.

S.P.S. TUBING	RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES						BOLT DIA. S.P.S. END
				A	G	H	L	P	T	
2	400 & 600	FL-160-AL	1	1 45/64	1 1/2	5/8	7 1/2	3 1/4	9/16	5/8
2	1200	FL-161-AL	2	1 45/64	3	5/8	7 1/2	3 1/4	9/16	5/8
2	2000	FL-162-AL	2	1 49/64	4	1 1/8	8 1/2	4 1/4	9/16	5/8
2 1/2	400 & 600	FL-169-AL	3	2 1/64	1 1/2	5/8	8 1/4	3 1/4	9/16	5/8
2 1/2	1200	FL-170-AL	4	2 1/64	3	5/8	8 1/4	3 1/4	9/16	5/8
2 1/2	2000	FL-171-AL	4	2 1/64	4	1 1/8	9 1/4	4 1/4	9/16	5/8
3	400 & 600	FL-179-AL	3	2 21/64	1 1/2	5/8	8 1/2	3 1/4	5/8	5/8
3	1200	FL-180-AL	4	2 25/64	3	5/8	8 1/2	3 1/4	5/8	5/8
3	2000	FL-181-AL	4	2 25/64	4	1 1/8	9 1/2	4 1/4	5/8	5/8
3 1/2	400 & 600	FL-188-AL	3	2 41/64	1 1/2	5/8	8 3/4	3 1/4	11/16	5/8
3 1/2	1200	FL-189-AL	4	2 45/64	3	5/8	8 3/4	3 1/4	11/16	5/8
3 1/2	2000	FL-190-AL	4	2 45/64	4	1 1/8	9 3/4	4 1/4	11/16	5/8
4	400 & 600	FL-191-AL	3	2 61/64	1 1/2	5/8	9 1/4	3 1/4	11/16	5/8
4	1200	FL-199-AL	4	2 61/64	3	5/8	9 1/4	3 1/4	11/16	5/8
4	2000	FL-200-AL	4	2 61/64	4	1 1/8	10 1/4	4 1/4	11/16	5/8
5	1200	FL-209-AL	5	3 9/16	3	5/8	10 1/4	3 1/4	3/4	5/8
5	2000	FL-210-AL	5	3 9/16	4	1 1/8	11 1/4	4 1/4	3/4	5/8
6	1200	FL-219-AL	5	4 1/8	3	5/8	11 1/4	3 1/4	3/4	5/8
6	2000	FL-220-AL	5	4 1/8	4	1 1/8	12 1/4	4 1/2	3/4	5/8

For cross reference or other information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

