

T-Connectors

FTU Tubing Run - Cable Tap


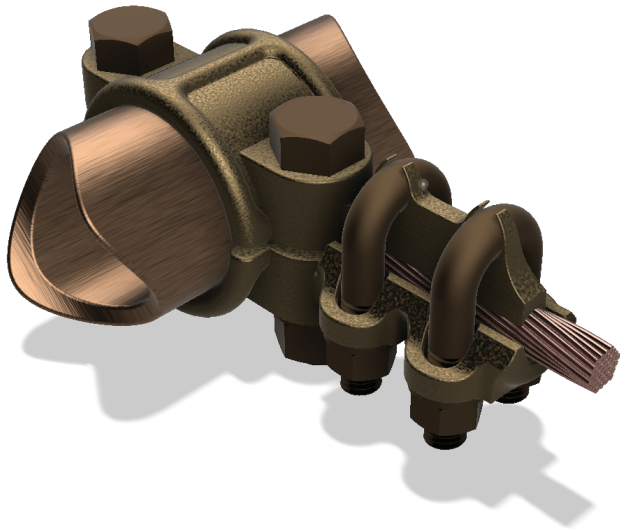


Fig 1

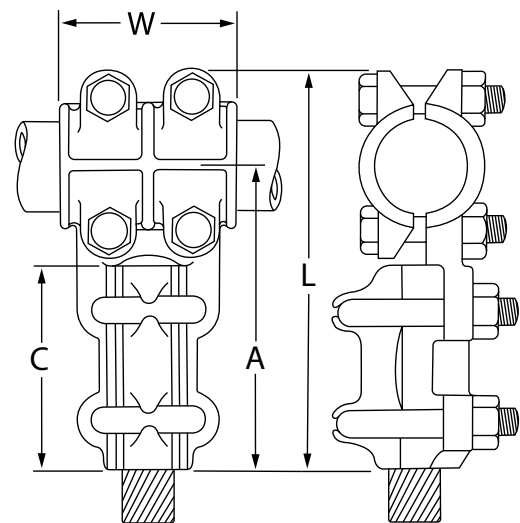


Fig 2

Type FTU connectors are designed for making a stranded cable tap from a I.P.S. tubular run. Adjustable cable tap covers a wide range of sizes and provides a convenient means of joining cable to tubing. Cable can be clamped in position and connector then placed on tubing main.

I.P.S. TUBING RUN	CABLE RANGE AWG / MCM		CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES				BOLT DIAMETER	
	MINIMUM	MAXIMUM			A	C	L	W	RUN	TAP
2	6	2/0	FTU-159	1	4 11/64	2	6 7/32	1 5/8	1/2	3/8
2	1	4/0	FTU-160	1	4 35/64	2 3/8	6 19/32	1 5/8	1/2	3/8
2	1/0	300	FTU-161	1	4 59/64	2 3/4	6 31/32	1 5/8	1/2	3/3
2	300	500	FTU-162	1	5 11/64	3	7 7/32	2 1/2	1/2	3/3
2	500	800	FTU-163	2	5 59/64	3 3/4	7 31/32	3 1/2	1/2	1/2
2	750	1000	FTU-164	2	6 11/64	4	8 7/32	3 1/2	1/2	1/2
2	1000	1500	FTU-165	2	6 43/64	4 1/2	8 23/32	3 1/2	1/2	1/2
2	1500	2000	FTU-166	2	6 43/64	4 1/2	8 23/32	3 1/2	1/2	1/2
2 1/2	6	2/0	FTU-169	1	4 7/16	2	6 3/4	1 5/8	1/2	3/8
2 1/2	1	4/0	FTU-170	1	4 13/16	2 3/8	7 1/8	1 5/8	1/2	3/8
2 1/2	1/0	300	FTU-171	1	5 3/16	2 3/4	7 1/2	1 5/8	1/2	3/8
2 1/2	300	500	FTU-172	1	5 7/16	3	7 3/4	2 1/2	1/2	3/8
2 1/2	500	800	FTU-173	2	6 3/16	3 3/4	8 1/2	3 1/2	1/2	1/2
2 1/2	750	1000	FTU-174	2	6 7/16	4	8 3/4	3	1/2	1/2
2 1/2	1000	1500	FTU-175	2	6 15/16	4 1/2	9 1/4	3 1/2	1/2	1/2
2 1/2	1500	2000	FTU-176	2	6 15/16	4 1/2	9 5/16	3 1/2	1/2	1/2
3	1	4/0	FTU-180	1	5 11/64	2 3/8	7 27/32	2	1/2	3/8
3	1/0	300	FTU-181	1	5 35/64	2 3/4	8 5/32	1 5/8	1/2	3/8
3	300	500	FTU-182	1	5 55/64	3	8 19/32	2 1/2	1/2	3/8
3	500	800	FTU-183	2	6 1/2	3 3/4	9 1/16	3 3/16	1/2	1/2
3	750	1000	FTU-184	2	6 3/4	4	9 9/32	3 3/16	1/2	1/2
3	1000	1500	FTU-185	2	7 15/64	4 1/2	9 27/32	3 3/16	1/2	1/2
3	1500	2000	FTU-186	2	7 19/64	4 1/2	10	4	1/2	1/2
3 1/2	1	4/0	FTU-190	1	5 3/8	2 3/8	8 1/4	2	1/2	3/8

(continued)

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**



T-Connectors

FTU Tubing Run - Cable Tap

(continued)

I.P.S. TUBING RUN	CABLE RANGE AWG / MCM		CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES				BOLT DIAMETER	
	MINIMUM	MAXIMUM			A	C	L	W	RUN	TAP
3 1/2	1/0	300	FTU-191	1	5 3/4	2 3/4	8 5/8	2	1/2	3/8
3 1/2	300	500	FTU-192	1	5 31/32	3	8 13/16	2	1/2	3/8
3 1/2	500	800	FTU-193	2	6 3/4	3 3/4	9 11/16	2 3/4	1/2	1/2
3 1/2	750	1000	FTU-194	2	7 1/16	4	10	4	1/2	1/2
3 1/2	1000	1500	FTU-195	2	7 9/16	4 1/2	10 1/2	4	1/2	1/2
3 1/2	1500	2000	FTU-196	2	7 9/16	4 1/2	10 1/2	4	1/2	1/2
4	1	4/0	FTU-200	1	5 5/8	2 3/8	8 3/4	2	1/2	3/8
4	1/0	300	FTU-201	1	6	2 3/4	9 1/8	2	1/2	3/8
4	300	500	FTU-202	1	6 1/4	3	9 7/16	2 1/2	1/2	3/8
4	500	800	FTU-203	2	7	3 3/4	10 1/8	3 3/16	1/2	1/2
4	750	1000	FTU-204	2	7 1/4	4	10 3/8	3 3/16	1/2	1/2
4	1000	1500	FTU-205	2	7 3/4	4 1/2	10 7/8	4	1/2	1/2
4	1500	2000	FTU-206	2	7 3/4	4 1/2	10 7/8	4	1/2	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

