

Terminal Connectors

FUD Dual Cable to Pad

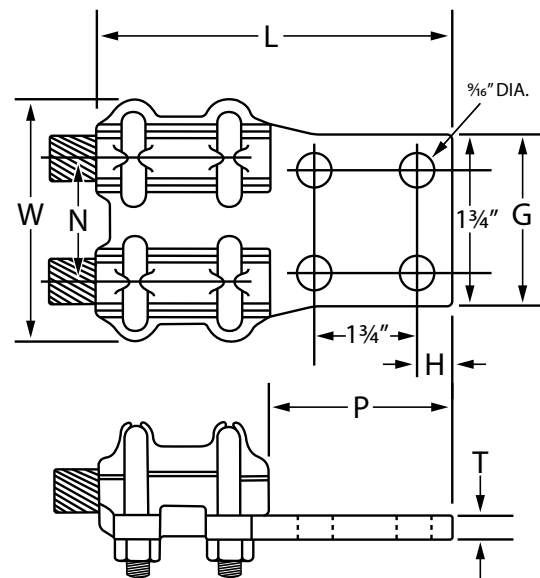
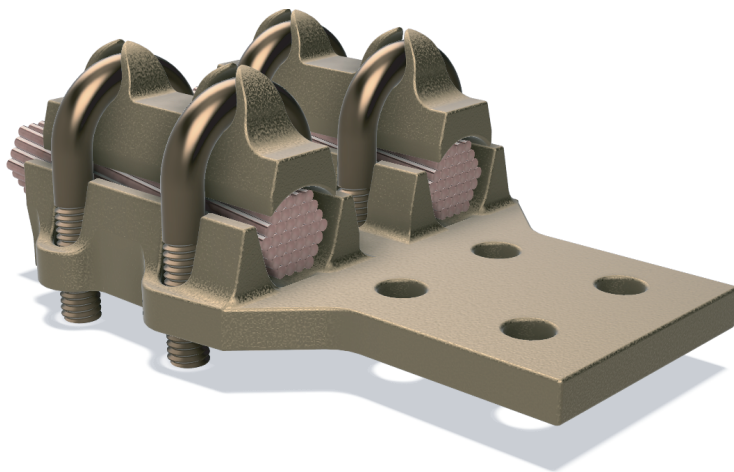


Fig. 2

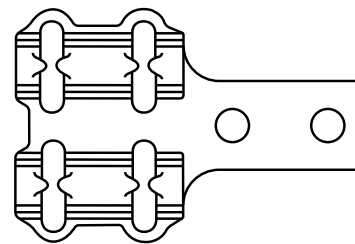


Fig. 1

Utilizing the same principals of those used in the type "FU" connectors, these twin lugs find many applications on disconnecting switches for oil circuit breakers, transformers, and similar uses. Adjustable yoke permits the use of a wide range of cable sizes in one size connector.

CABLE RANGE A.W.G. OR M.C.M.		RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES							U-BOLT DIA.
MIN.	MAX.				G	H	L	N	P	T	W	
6	2/0	400 & 600	FUD-100	1	1 1/2	5/8	5 1/4	1 23/32	3 1/4	5/16	3 5/16	3/8
1	4/0	400 & 600	FUD-110	1	1 1/2	5/8	5 5/8	1 13/16	3 1/4	11/32	3 1/2	3/8
1	4/0	1200	FUD-111	2	3	5/8	5 5/8	1 13/16	3 1/4	5/16	3 1/2	3/8
1/0	300	400 & 600	FUD-120	1	1 1/2	5/8	6	2	3 1/4	3/8	3 7/8	3/8
1/0	300	1200	FUD-121	2	3	5/8	6	2	3 1/4	13/32	3 7/8	3/8
300	500	400 & 600	FUD-131	1	1 1/2	5/8	6 1/4	2 1/8	3 1/4	3/8	4 1/8	3/8
300	500	1200	FUD-132	2	3	5/8	6 1/4	2 1/8	3 1/4	3/8	4 1/8	3/8
300	500	2000	FUD-133	2	4	1 1/8	7 1/4	2 1/8	4 1/4	3/8	4 1/8	3/8
500	800	400 & 600	FUD-140	1	1 1/2	5/8	7	2 11/16	3 1/4	3/8	5 1/4	1/2
500	800	1200	FUD-141	2	3	5/8	7	2 11/16	3 1/4	7/16	5 1/4	1/2
500	800	2000	FUD-142	2	4	1 1/8	8	2 11/16	4 1/4	1/2	5 1/4	1/2
750	1000	400 & 600	FUD-150	1	1 1/2	5/8	7 1/4	2 7/8	3 1/4	7/16	5 5/8	1/2
750	1000	1200	FUD-151	2	3	5/8	7 1/4	2 7/8	3 1/4	1/2	5 5/8	1/2
750	1000	2000	FUD-152	2	4	1 1/8	8 1/4	2 7/8	4 1/4	1/2	5 5/8	1/2
1000	1500	1200	FUD-160	2	3	5/8	7 3/4	3 1/8	3 1/4	1/2	6 1/4	1/2
1000	1500	2000	FUD-161	2	4	1 1/8	8 3/4	3 1/8	4 1/4	1/2	6 1/4	1/2
1500	2000	1200	FUD-170	2	3	5/8	7 3/4	3 7/16	3 1/4	9/16	6 3/4	1/2
1500	2000	2000	FUD-171	2	4	1 1/8	8 3/4	3 7/16	4 1/4	1/2	6 3/4	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

