

Terminal Connectors

FUL Tubing to Pad - 90°

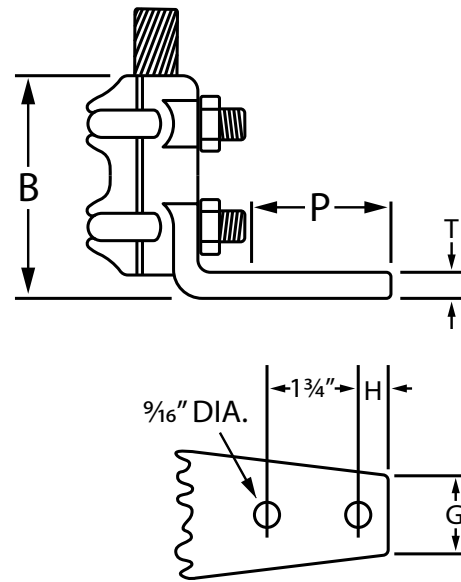
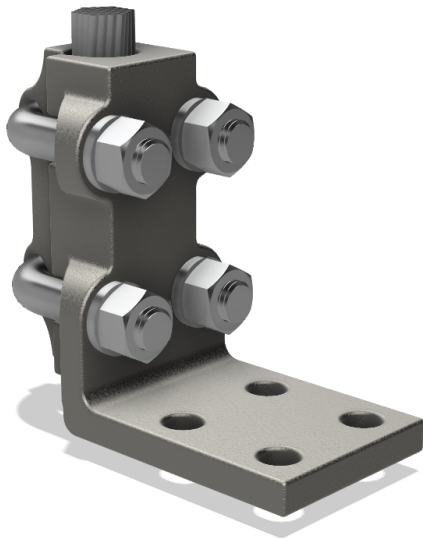


Fig. 1




Fig. 2

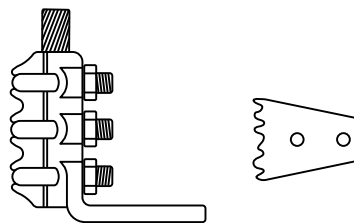


Fig. 3




Fig. 4

The 90° high compression terminal lug provides an economical means of making a vertical connection from switch or equipment terminals.

CABLE RANGE A.W.G. OR M.C.M.		RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES					U-BOLT DIA CABLE END
ALUMINUM	A.C.S.R.				G	H	L	N	W	
6 to 2/0	6 to 1/0	400 & 600	FUL-100-AL	1	2 7/8	1 1/2	5/8	3	3/8	1/2
1/0 to 300	1/0 to 266.8	400 & 600	FUL-120-AL	1	3 7/8	1 1/2	5/8	3	3/8	1/2
1/0 to 300	1/0 to 266.8	1200	FUL-121-AL	2	3 7/8	3	5/8	3	3/8	1/2
1/0 to 300	1/0 to 266.8	2000	FUL-122-AL	2	3 7/8	4	1 1/8	4	3/8	1/2
300 to 500	266.8 to 397.5	400 & 600	FUL-130-AL	1	4 3/16	1 1/2	5/8	3	7/16	1/2
300 to 500	266.8 to 397.5	1200	FUL-131-AL	2	4 3/16	3	5/8	3	7/16	1/2
300 to 500	266.8 to 397.5	2000	FUL-132-AL	2	4 3/16	4	1 1/8	4	7/16	1/2
500 to 800	397.5 to 666.6	400 & 600	FUL-140-AL	1	5 1/4	1 1/2	5/8	3	1/2	5/8
500 to 800	397.5 to 666.6	1200	FUL-141-AL	2	5 1/4	3	5/8	3	1/2	5/8
500 to 800	397.5 to 666.6	2000	FUL-142-AL	2	5 1/4	4	1 1/8	4	1/2	5/8
750 to 1000	636 to 900	400 & 600	FUL-150-AL	3	5 15/16	1 1/2	5/8	3	9/16	5/8
750 to 1000	636 to 900	1200	FUL-151-AL	4	5 15/16	3	5/8	3	9/16	5/8
750 to 1000	636 to 900	2000	FUL-152-AL	4	5 15/16	4	1 1/8	4	9/16	5/8
1000 to 1500	900 to 1272	400 & 600	FUL-159-AL	3	6 3/8	1 1/2	5/8	3	5/8	5/8
1000 to 1500	900 to 1272	1200	FUL-160-AL	4	6 3/8	3	5/8	3	5/8	5/8
1000 to 1500	900 to 1272	2000	FUL-161-AL	4	6 3/8	4	1 1/8	4	5/8	5/8
1510.5 to 2000	1351.5 to 1780	1200	FUL-170-AL	4	6 11/16	3	5/8	3	11/16	5/8
1510.5 to 2000	1351.5 to 1780	2000	FUL-171-AL	4	6 3/4	4	1 1/8	4	3/4	5/8

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

