

Terminal Connectors

LS Cable to Pad

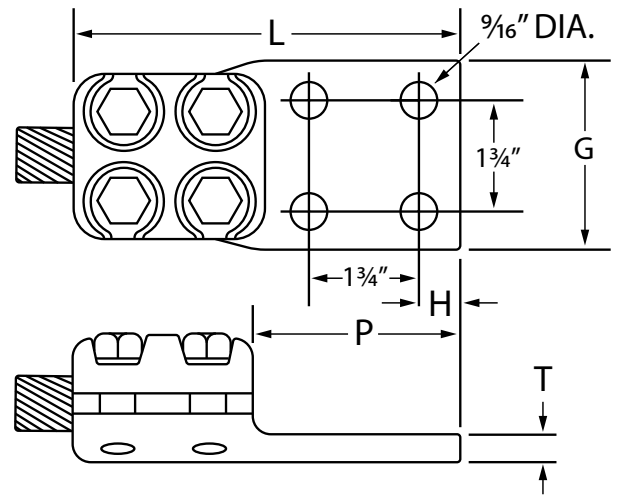
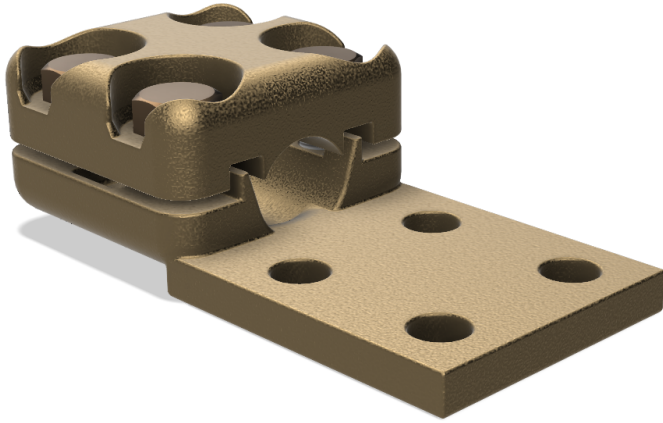


Fig. 4

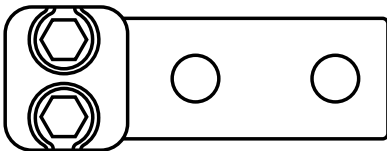


Fig. 1

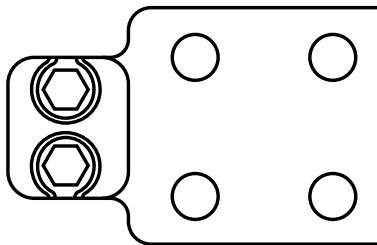


Fig. 2

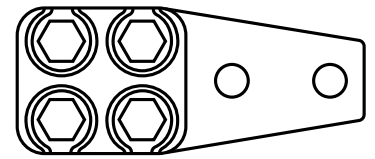


Fig. 3

Lugs with recessed bolt heads find application wherever it is advisable to tape connection.

CABLE RANGE A.W.G. OR M.C.M.		RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES					BOLT DIAMETER
MIN	MAX				G	H	L	P	T	
6	2/0	600	LS-100	1	1 1/2	5/8	4 3/4	3 1/4	1/4	3/8
1	4/0	600	LS-110	1	1 1/2	5/8	4 3/4	3 1/4	5/16	3/8
1	4/0	1200	LS-111	2	3	5/8	4 3/4	3 1/4	1/4	3/8
1/0	300	600	LS-120	3	1 1/2	5/8	5 5/8	3 1/4	5/16	3/8
1/0	300	1200	LS-121	4	3	5/8	5 5/8	3 1/4	1/4	3/8
300	500	600	LS-130	3	1 1/2	5/8	5 5/8	3 1/4	11/32	3/8
300	500	1200	LS-131	4	3	5/8	5 5/8	3 1/4	11/32	3/8
500	800	600	LS-140	3	1 1/2	5/8	6 1/4	3 1/4	3/8	1/2
500	800	1200	LS-141	4	3	5/8	6 1/4	3 1/4	7/16	1/2
500	800	2000	LS-142	4	4	1 1/8	7 1/4	4 1/4	7/16	1/2
750	1000	600	LS-150	3	1 1/2	5/8	6 3/4	3 1/4	7/16	1/2
750	1000	1200	LS-151	4	3	5/8	6 3/4	3 1/4	7/16	1/2
750	1000	2000	LS-152	4	4	1 1/8	7 1/4	4 1/4	3/8	1/2
1000	1500	600	LS-160	3	1 1/2	5/8	6 3/4	3 1/4	7/16	1/2
1000	1500	1200	LS-161	4	3	5/8	6 3/4	3 1/4	7/16	1/2
1000	1500	2000	LS-162	4	4	1 1/8	7 3/4	4 1/4	1/2	1/2
1500	2000	600	LS-170	3	1 1/2	5/8	6 3/4	3 1/4	1/2	1/2
1500	2000	1200	LS-171	4	3	5/8	6 3/4	3 1/4	1/2	1/2
1500	2000	2000	LS-172	4	4	1 1/8	7 3/4	4 1/4	1/2	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

