

Terminal Connectors

UB Cable to Pad

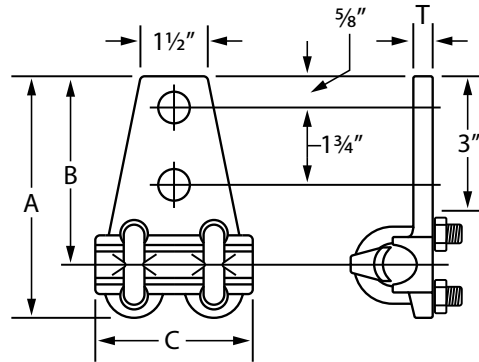
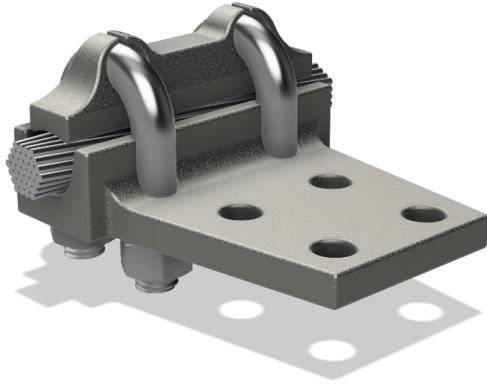


Fig. 1




Fig. 2

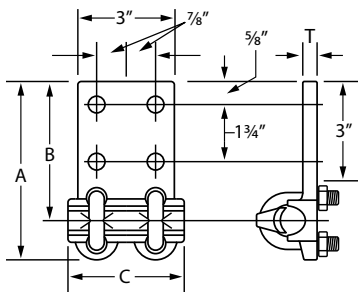


Fig. 3




Fig. 4

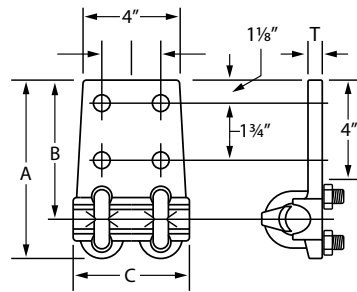


Fig. 5




Fig. 6

"UB" connectors are designed to connect aluminum or A.C.S.R. cable to switch pads, equipment tangs or bar.

CABLE RANGE A.W.G. OR M.C.M.		RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES				BOLT DIA CABLE END
ALUMINUM	A.C.S.R.				A	B	C	T	
6 to 2/0	6 to 1/0	600	UB-80-AL	1	5 1/2	4 5/16	2 1/2	3/8	1/2
6 to 2/0	6 to 1/0	1200	UB-81-AL	3	5 1/2	4 5/16	2 1/2	3/8	1/2
6 to 2/0	6 to 1/0	2000	UB-82-AL	5	6 1/2	5 5/16	2 1/2	3/8	1/2
1/0 to 300	1/0 to 266.8	600	UB-100-AL	1	5 1/2	4 5/16	3 1/2	3/8	1/2
1/0 to 300	1/0 to 266.8	1200	UB-101-AL	3	5 1/2	4 5/16	3 1/2	3/8	1/2
1/0 to 300	1/0 to 266.8	2000	UB-102-AL	5	6 1/2	5 5/16	3 1/2	3/8	1/2
300 to 500	266.8 to 397.5	600	UB-110-AL	1	5 5/8	4 3/8	3 3/4	7/16	1/2
300 to 500	266.8 to 397.5	1200	UB-111-AL	3	5 5/8	4 3/8	3 3/4	7/16	1/2
300 to 500	266.8 to 397.5	2000	UB-112-AL	5	6 5/8	5 3/8	3 3/4	7/16	1/2
500 to 800	397.5 to 666.6	600	UB-120-AL	1	6 1/8	4 19/32	4 3/4	1/2	5/8
500 to 800	397.5 to 666.6	1200	UB-121-AL	3	6 3/16	4 21/32	4 3/4	1/2	5/8
500 to 800	397.5 to 666.6	2000	UB-122-AL	5	7 3/16	5 21/32	4 3/4	1/2	5/8
750 to 1000	636 to 900	600	UB-130-AL	2	6 3/8	4 3/4	5 3/8	9/16	5/8
750 to 1000	636 to 900	1200	UB-131-AL	4	6 1/4	4 5/8	5 3/8	9/16	5/8
750 to 1000	636 to 900	2000	UB-132-AL	6	7 3/8	5 3/4	5 3/8	9/16	5/8
1000 to 1500	900 to 1272	600	UB-139-AL	2	6 5/8	4 7/8	5 3/4	5/8	5/8
1000 to 1500	900 to 1272	1200	UB-140-AL	4	6 1/2	4 3/4	5 3/4	5/8	5/8
1000 to 1500	900 to 1272	2000	UB-141-AL	6	7 5/8	5 7/8	5 3/4	5/8	5/8
1510.5 to 2000	1351.5 to 1780	1200	UB-149-AL	4	6 15/16	5 1/32	6	11/16	5/8
1510.5 to 2000	1351.5 to 1780	2000	UB-150-AL	6	7 15/16	6 1/32	6	3/4	5/8

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

