

Straight Connectors

UU-AL Cable - Cable

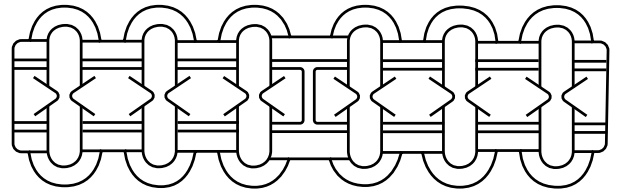
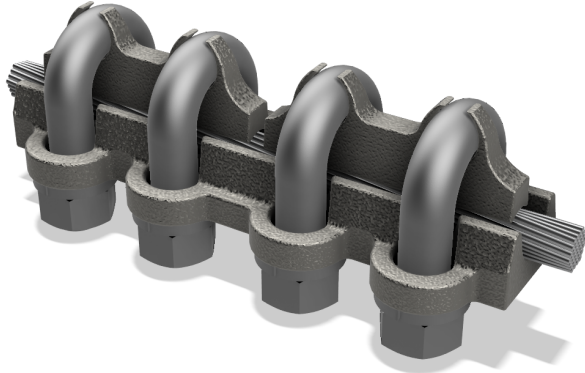


Fig 2

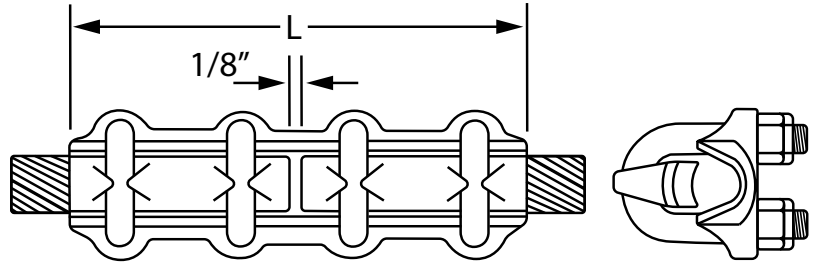


Fig 1

The "UU" connector joins two stranded cables end to end. It is designed to withstand severe pull-out loads. Because each "UU" connector covers a wide range of cable sizes, the number of connectors stocked can be held to a minimum.

CABLE RANGE				CATALOG NUMBER	CATALOG NUMBER	DIMENSIONS IN INCHES	U-BOLT DAIMETER
RUN		TAP					
ALUMINUM	A.C.S.R.	ALUMINUM	A.C.S.R.			L	TAP
6 to 2/0	6 to 1/0	6 to 2/0	6 to 1/0	UU-100-AL	1	5 1/8	1/2
1/0 to 300	1/0 to 266.8	1/0 to 300	1/0 to 266.8	UU-102-AL	1	7 1/8	1/2
300 to 500	266.8 to 397.5	300 to 500	266.8 to 397.5	UU-103-AL	1	7 5/8	1/2
500 to 800	397.5 to 666.6	500 to 800	397,5 to 666.6	UU-104-AL	1	9 5/8	5/8
750 to 1000	636 to 900	750 to 1000	636 to 900	UU-105-AL	2	10 7/8	5/8
1000 to 1500	900 to 1272	1000 to 1500	900 to 1272	UU-106-AL	2	11 5/8	5/8
1510.5 to 2000	1351.5 to 1780	1510.5 to 2000	1351.5 to 1780	UU-107-AL	2	12 1/8	5/8

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

