
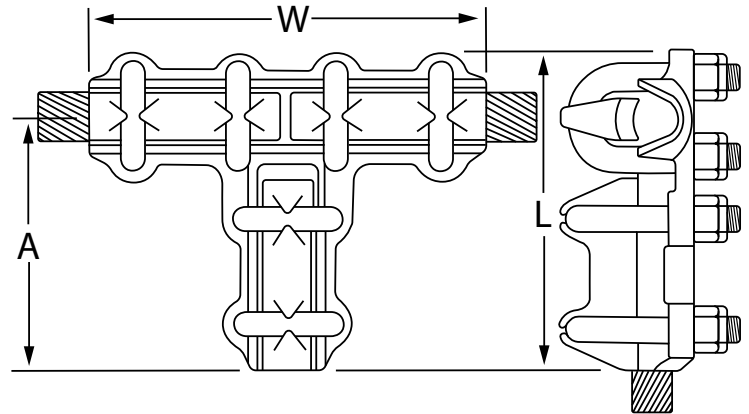


T-Connectors

UUT Stranded Cable Run - Tap

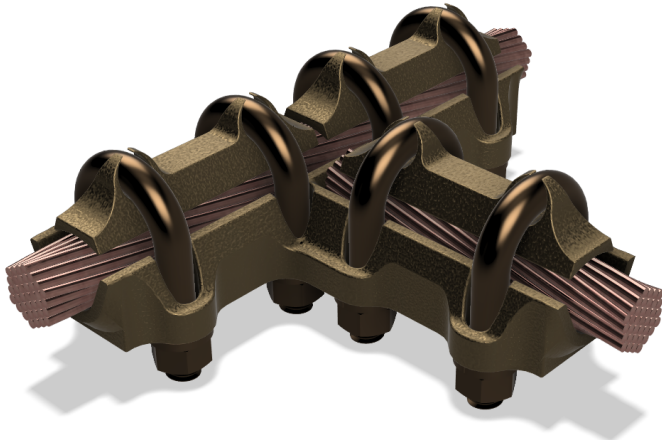

A combination straight coupler and T-connector for making a cable tap at the splice point. Edges and ends of the connectors are rounded to prevent crystallization or abrasion of the conductor at these points.

CABLE RANGE				CATALOG NUMBER	DIMENSIONS IN INCHES			U-BOLT DIAMETER	
RUN		TAP			A	L	W	RUN	TAP
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM						
6	2/0	6	2/0	UUT-100	2 49/ 64	3 9/16	4 1/8	3/8	3/8
1	4/0	1	4/0	UUT-110	3 7/32	4 1/16	4 7/8	3/8	3/8
1/0	300	1/0	300	UUT-120	3 5/8	4 9/16	5 5/8	3/8	3/8
300	500	300	500	UUT-130	3 7/8	4 7/8	6 1/8	3/8	3/8
500	800	300	500	UUT-139	4 11//32	5 5/8	7 5/8	1/2	3/8
500	800	500	800	UUT-140	5 1/32	6 1/4	7 5/8	1/2	1/2
750	1000	300	500	UUT-148	4 7/16	5 13/16	8 1/8	1/2	3/8
750	1000	500	800	UUT-149	5 1/8	6 1/2	8 1/8	1/2	1/2
750	1000	750	1000	UUT-150	5 1/4	6 5/8	8 1/8	1/2	1/2
1000	1500	1000	1500	UUT-160	5 3/4	7 5/16	9 1/8	1/2	1/2
1500	2000	1500	2000	UUT-170	6	7 7/8	9 1/8	1/2	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

