
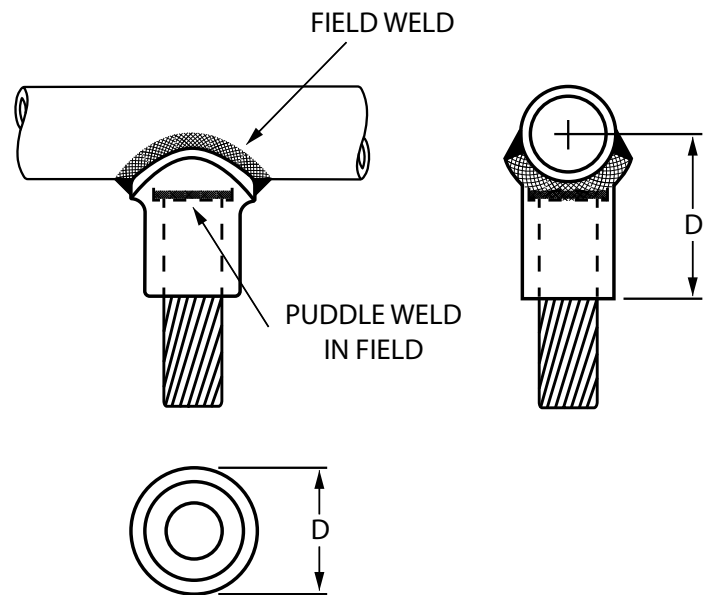


Welded Connectors

WTU Tubing to Cable

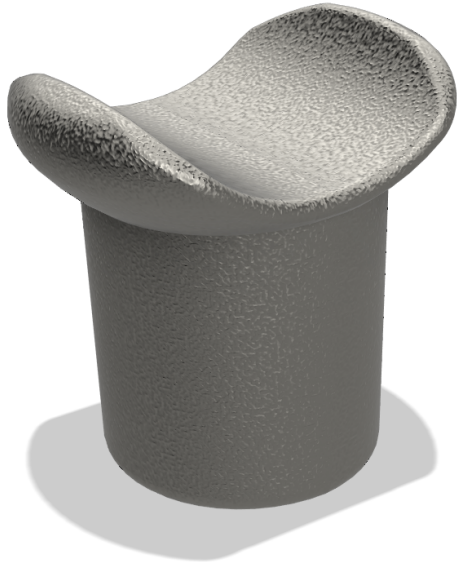

WTU welding T type connector permits the joining of a cable tap to a tubular bus run. The stranded cable conductor fits neatly into the connector and is puddle welded. The saddle of the connector fits easily and snugly onto the tubing run. The connector is field welded on the tubular bus.

S.P.S. TUBING	CABLE RANGE AWG / MCM		CATALOG NUMBER	DIMENSIONS IN INCHES	
	ALUMINUM	A.C.S.R.		A	C
2	3/0	-	WTU-151.1-AL	2 9/16	2 1/2
2	4/0	3/0	WTU-151.2-AL	2 9/16	2 1/2
2	250 & 266.8	4/0	WTU-151.3-AL	2 9/16	2 1/2
2	300 & 336.6	266.8	WTU-152.1-AL	2 13/16	2 1/2
2	350	300	WTU-152.2-AL	2 13/16	2 1/2
2	397.5 & 400	336.4	WTU-152.3-AL	2 13/16	2 1/2
2	450 - 500	397.5	WTU-152.4-AL	2 13/16	2 1/2
2	556.5	.	WTU-152.5-AL	2 13/16	2 1/2
2	.	477	WTU-153.1-AL	3 1/16	2 1/2
2	600 - 650	556.5	WTU-153.2-AL	3 1/16	2 1/2
2	700 - 800	605 - 666.6	WTU-153.3-AL	3 1/16	2 1/2

(continued)

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**



Welded Connectors

WTU Tubing to Cable

(continued)

S.P.S. TUBING	CABLE RANGE AWG / MCM		CATALOG NUMBER	DIMENSIONS IN INCHES	
	ALUMINUM	A.C.S.R.		A	C
2 1/2	954	900	WTU-164.2-AL	3 5/8	2 1/2
2 1/2	1000 - 1113	954	WTU-164.3-AL	3 5/8	2 1/2
2 1/2	1192.5 & 1200	1033.5	WTU-165.1-AL	3 7/8	2 1/2
2 1/2	1250 - 1300	1113	WTU-165.2-AL	3 7/8	2 1/2
2 1/2	1351.5 & 1431	1192.5 & 1272	WTU-165.3-AL	3 7/8	2 1/2
2 1/2	1500 - 1600	1351.5 & 1431	WTU-165.4-AL	3 7/8	2 1/2
2 1/2	1700 - 1800	1510.5 & 1590	WTU-165.5-AL	3 7/8	2 1/2
3	3/0	.	WTU-171.1-AL	3 3/16	2 1/2
3	4/0	3/0	WTU-171.2-AL	3 3/16	2 1/2
3	250 & 266.8	4/0	WTU-171.3-AL	3 3/16	2 1/2
3	300 & 336.4	266.8	WTU-172.1-AL	3 7/16	2 1/2
3	350	300	WTU-172.2-AL	3 7/16	2 1/2
3	397.5 & 400	336.4	WTU-172.3-AL	3 7/16	2 1/2
3	450 - 500	397.5	WTU-172.4-AL	3 7/16	2 1/2
3	550 & 556.6	-	WTU-172.5-AL	3 7/16	2 1/2
3	-	477	WTU-173.1-AL	3 11/16	2 1/2
3	600 - 650	556.5	WTU-173.2-AL	3 11/16	2 1/2
3	700 - 800	605 - 666.6	WTU-173.3-AL	3 11/16	2 1/2
3	750	715.5	WTU-173.4-AL	3 11/16	2 1/2
3	900	795	WTU-174.1-AL	3 15/16	2 1/2
2	750	715.5	WTU-153.4-AL	3 1/16	2 1/2
2	900	795	WTU-154.1-AL	3 5/16	2 1/2
2	954	900	WTU-154.2-AL	3 5/16	2 1/2

(continued)

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**



Welded Connectors

WTU Tubing to Cable

(continued)

S.P.S. TUBING	CABLE RANGE AWG / MCM		CATALOG NUMBER	DIMENSIONS IN INCHES	
	ALUMINUM	A.C.S.R.		A	C
2	1000 - 1113	954	WTU-154.3-AL	3 5/16	2 1/2
2	1192.5 & 1200	1033.5	WTU-155.1-AL	3 9/16	2 1/2
2	1250 - 1300	1113	WTU-155.2-AL	3 9/16	2 1/2
2	1351.5 & 1431	1192.5 & 1272	WTU-155.3-AL	3 9/16	2 1/2
2	1500 - 1600	1351.5 & 1431	WTU-155.4-AL	3 9/16	2 1/2
2	1700 - 1800	1510.5 & 1590	WTU-155.5-AL	3 9/16	2 1/2
2 1/2	1/0	-	WTU-160.1-AL	2 5/8	2 1/2
2 1/2	2/0	1/0 & 2/0	WTU-160.2-AL	2 5/8	2 1/2
2 1/2	3/0	-	WTU-161.1-AL	2 7/8	2 1/2
2 1/2	4/0	3/0	WTU-161.2-AL	2 7/8	2 1/2
2 1/2	250 & 266.8	4/0	WTU-161.3-AL	2 7/8	2 1/2
2 1/2	300 & 336.4	266.8	WTU-162.1-AL	3 1/8	2 1/2
2 1/2	350	300	WTU-162.2-AL	3 1/8	2 1/2
2 1/2	397.5 & 400	336.4	WTU-162.3-AL	3 1/8	2 1/2
2 1/2	450 . 500	397.5	WTU-162.4-AL	3 1/8	2 1/2
2 1/2	550 & 556.6	-	WTU-162.5-AL	3 1/8	2 1/2
2 1/2	-	477	WTU-163.1-AL	3 3/8	2 1/2
2 1/2	600 - 650	556.5	WTU-163.2-AL	3 3/8	2 1/2
2 1/2	700 - 800	605 - 666.6	WTU-163.3-AL	3 3/8	2 1/2
2 1/2	750	715.5	WTU-163.4-AL	3 3/8	2 1/2
2 1/2	900	795	WTU-164.1-AL	3 5/8	2 1/2
2 1/2	954	900	WTU-164.2-AL	3 5/8	2 1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

