
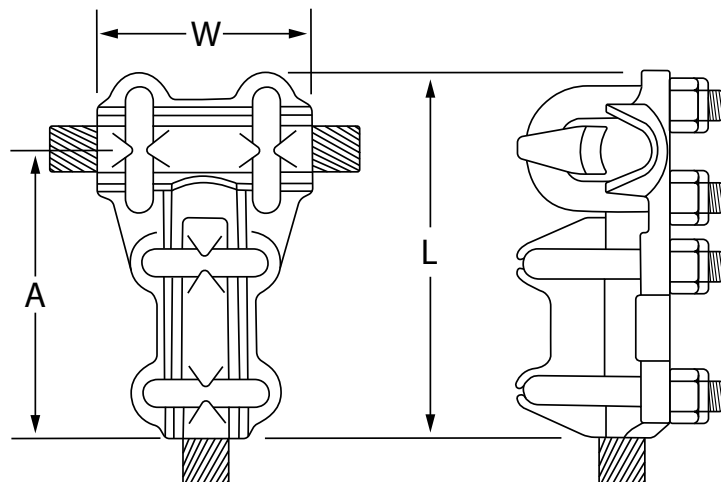


T-Connectors

TU Stranded Cable Run - Tap

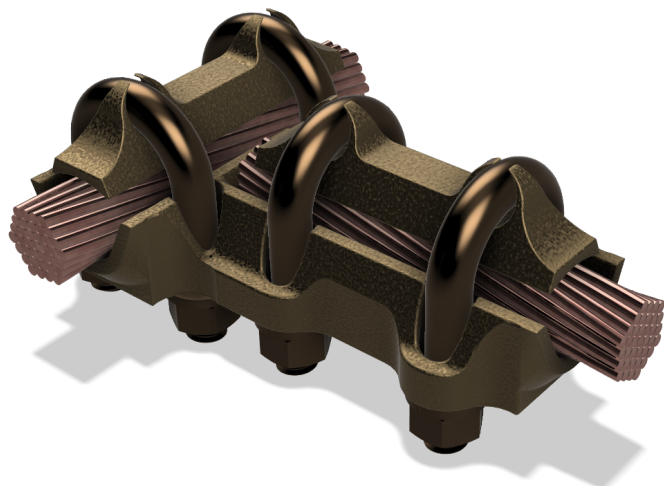

Delta Star type TU connectors for stranded cable find extensive use in substation, distribution and transmission line service. The high strength and long, efficient life of these connectors have made them widely accepted throughout the power industry.

A longitudinal wave cast in both body and yoke of the connector insures constant and permanent pressure on the conductor. As the U-bolts are tightened a definite wrapping action is obtained, eliminating slipping or loosening of the connector in service.

CABLE RANGE				CATALOG NUMBER	DIMENSIONS IN INCHES			BOLT DIAMETER	
RUN		TAP			A	L	W	RUN	TAP
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM						
6	2/0	6	2/0	TU-100	2 3/4	3 17/32	2	3/8	3/8
1	4/0	1	4/0	TU-110	3 7/32	4 1/16	2 3/8	3/8	3/8
1/0	300	6	2/0	TU-120	2 15/16	3 7/8	2 3/4	3/8	3/8
1/0	300	1/0	300	TU-121	3 5/8	4 9/16	2 3/4	3/8	3/8
1/0	300	300	500	TU-122	3 3/4	4 11/16	2 3/4	3/8	3/8
300	500	6	2/0	TU-130	3	4	3	3/8	3/8
300	500	1/0	300	TU-131	3 11/16	4 21/32	3	3/8	3/8
300	500	300	500	TU-132	3 7/8	4 27/32	3	3/8	3/8
300	500	500	800	TU-133	4 9/16	5 9/16	3	3/8	1/2
300	500	750	1000	TU-134	4 15/16	5 15/16	3	3/8	1/2
500	800	1/0	300	TU-140	4 5/32	5 7/16	2 3/4	1/2	3/8
500	800	300	500	TU-141	4 7/32	5 1/2	2 3/4	1/2	3/3
500	800	500	800	TU-142	5	6 7/32	3 3/4	1/2	1/2
750	1000	1/0	300	TU-150	4 1/16	5 7/16	3	1/2	3/8
750	1000	300	500	TU-151	4 3/16	5 9/16	3	1/2	3/8
750	1000	500	800	TU-152	5 1/16	6 7/16	4	1/2	1/2
750	1000	750	1000	TU-153	5 1/8	6 1/2	4	1/2	1/2

(continued)

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**



T-Connectors

TU Stranded Cable Run - Tap

(continued)

CABLE RANGE				CATALOG NUMBER	DIMENSIONS IN INCHES			BOLT DIAMETER	
RUN		TAP			A	L	W	RUN	TAP
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM						
1000	1500	6	2/0	TU-158	3 1/2	5	3	1/2	3/8
1000	1500	1/0	300	TU-160	4 5/16	5 13/16	3	1/2	3/8
1000	1500	300	500	TU-161	4 9/16	6 1/16	3	1/2	3/8
1000	1500	500	800	TU-162	5 5/16	6 13/16	3	1/2	1/2
1000	1500	750	1000	TU-163	5 3/16	6 3/4	4 1/2	1/2	1/2
1000	1500	1000	1500	TU-164	5 15/16	7 1/2	4 1/2	1/2	1/2
1500	2000	1/0	300	TU-170	4 11/32	6	3 1/8	1/2	3/8
1500	2000	300	500	TU-171	4 27/32	6 1/2	3 1/8	1/2	3/8
1500	2000	500	800	TU-172	5 13/32	7	3 1/8	1/2	1/2
1500	2000	750	1000	TU-173	5 15/32	7 1/8	3 1/2	1/2	1/2
1500	2000	1000	1500	TU-174	5 27/32	7 1/2	4 1/2	1/2	1/2
1500	2000	1500	2000	TU-175	5 31/32	7 17/32	4 1/2	1/2	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

