
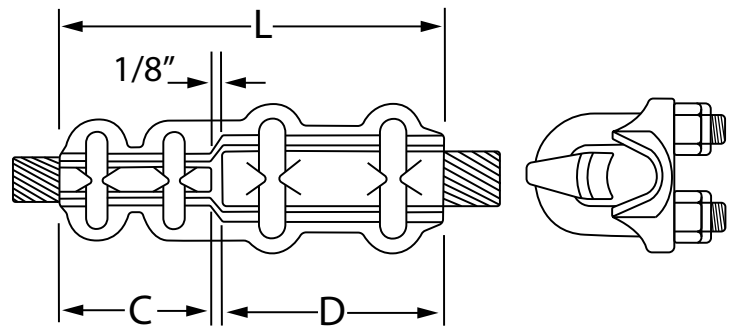


Reducers

UR Stranded Cable Run - Tap

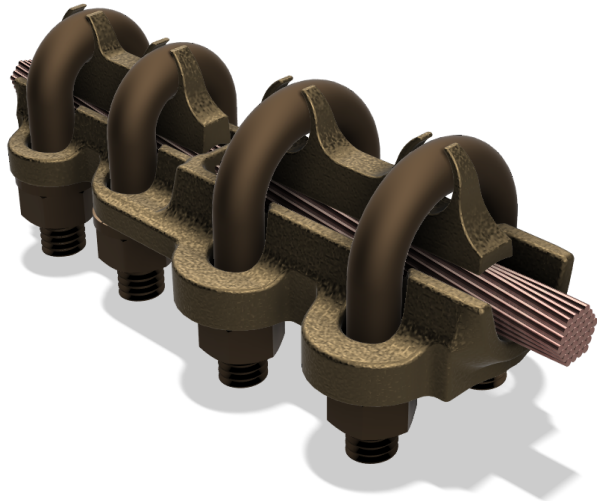

This clamp type reducer is constructed on the same principle as the Type UU straight connector except that it incorporates a large and a small section for connecting two cables of different sizes. Has many applications in substation work.

CABLE RANGE				CATALOG NUMBER	DIMENSIONS IN INCHES			U-BOLT DIAMETER	
RUN		TAP			C	D	L	RUN	TAP
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM						
1	4/0	6	2/0	UR-100	2	2 3/8	4 1/2	3/8	3/8
1/0	300	1	4/0	UR-110	2 3/8	2 3/4	5 1/4	3/8	3/8
300	500	6	2/0	UR-118	2	3	5 1/8	3/8	3/8
300	500	1/0	300	UR-120	2 3/4	3	5 7/8	3/8	3/8
500	800	1/0	300	UR-130	2 3/4	3 3/4	6 5/8	1/2	3/8
500	800	300	500	UR-140	3	3 3/4	6 7/8	1/2	3/8
750	1000	1/0	300	UR-150	2 3/4	4	6 7/8	1/2	3/8
750	1000	300	500	UR-160	3	4	7 1/8	1/2	3/8
750	1000	500	800	UR-170	3 3/4	4	7 7/8	1/2	1/2
1000	1500	500	800	UR-180	3 3/4	4 1/2	8 3/8	1/2	1/2
1000	1500	750	1000	UR-190	4	4 1/2	8 5/8	1/2	1/2
1500	2000	500	800	UR-200	3 3/4	4 1/2	8 3/8	1/2	1/2
1500	2000	750	1000	UR-210	4	4 1/2	8 5/8	1/2	1/2
1500	2000	1000	1500	UR-220	4 1/2	4 1/2	9 1/8	5/8	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

